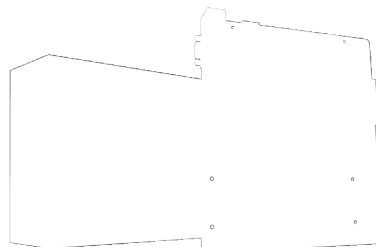


**Matična ploča AM4 Gigabyte A520M K V2 G10  
HDMI/M.2**Šifra: 2631  
Kategorija proizvoda: AMD  
Proizvođač: Gigabyte**Cena: 6.438,00** rsd.

<b>Model</b>	Gigabyte A520M K V2 Matična ploča DDR4 AM4 Micro ATX
<b>Procesorsko podnožje (Socket)</b>	AMD Socket AM4
<b>Skup čipova (Chipset)</b>	AMD A520
<b>Podrška za procesore</b>	AMD Socket AM4, support for: AMD Ryzen™ 5000 G-Series Processors/ AMD Ryzen™ 5000 Series Processors/ AMD Ryzen™ 4000 G-Series Processors/ AMD Ryzen™ 3000 Series Processors
<b>Tip memorije (RAM)</b>	DDR4
<b>Broj memorijskih slotova</b>	2x 288-Pin DDR4
<b>Podrška za memorije</b>	2 x DDR4 DIMM sockets supporting up to 64 GB (32 GB single DIMM capacity) of system memory Support for DDR4 5100(O.C.) / 4800(O.C.) / 4600(O.C.) / 4400(O.C.) / 4266(O.C.) / 4133(O.C.) / 4000(O.C.) / 3866(O.C.) / 3733(O.C.) / 3600(O.C.) / 3466(O.C.) / 3400(O.C.) / 3200 / 2933 / 2667 / 2400 / 2133 MHz memory modules Dual channel memory architecture Support for ECC Un-buffered DIMM 1Rx8/2Rx8 memory modules (operate in non-ECC mode) Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules Support for Extreme Memory Profile (XMP) memory modules
<b>Podrška za grafiku - portovi</b>	Integrated Graphics Processor: 1 x D-Sub port, supporting a maximum resolution of 1920x1200@60 Hz 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz  Maximum shared memory of 16 GB
<b>Slotovi za proširenja</b>	CPU: 1 x PCI Express x16 slot, supporting PCIe 3.0 and running at x16  Chipset: 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1
<b>M.2 portovi</b>	1x M.2 Socket 3
<b>Čuvanje podataka - portovi</b>	CPU: 1 x M.2 connector (Socket 3, M key, type 2280 SATA and PCIe 3.0 x4/x2 SSD support)  Chipset: 4 x SATA 6Gb/s connectors  Support for RAID 0, RAID 1, and RAID 10
<b>U.2 portovi</b>	nema
<b>SATA Express portovi</b>	nema

<b>SATA portovi</b>	4x SATA 6Gb/s
<b>LAN</b>	Realtek® GbE LAN chip (1 Gbps/100 Mbps)
<b>Zvuk (Audio)</b>	Realtek® Audio CODEC High Definition Audio 2/4/5.1/7.1-channel
<b>USB portovi</b>	CPU: 4 x USB 3.2 Gen 1 ports on the back panel  Chipset: 2 x USB 3.2 Gen 1 ports available through the internal USB header 6 x USB 2.0/1.1 ports (2 ports on the back panel, 4 ports available through the internal USB headers)
<b>Konektori na zadnjoj strani</b>	1 x PS/2 keyboard/mouse port 1 x D-Sub port 1 x HDMI port 4 x USB 3.2 Gen 1 ports 2 x USB 2.0/1.1 ports 1 x RJ-45 port 3 x audio jacks
<b>Unutrašnji konektori</b>	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x system fan header 1 x M.2 Socket 3 connector 4 x SATA 6Gb/s connectors 1 x front panel header 1 x front panel audio header 1 x USB 3.2 Gen 1 header 2 x USB 2.0/1.1 headers 1 x Trusted Platform Module (TPM) header (2x6 pin, for the GC-TPM2.0_S module only) 1 x speaker header 1 x Clear CMOS jumper 1 x chassis intrusion header
<b>Posebne mogućnosti</b>	Support for APP Center @BIOS EasyTune Smart Backup System Information Viewer Support for Q-Flash Support for Xpress Install
<b>Operativni sistem</b>	Windows® 10; Windows® 11
<b>BIOS</b>	1 x 128 Mbit flash Use of licensed AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
<b>Format</b>	Micro ATX