


MB s1700 ASRock B760M-HDV/M.2 D4 90-MXBL40-A0UAYZ

Šifra: 8192  
Kategorija proizvoda: Intel  
Proizvođač: AsRock

Cena: **10.879,00** rsd.

Unique Feature  
**Rock-Solid Durability**  
- 5+1+1 Power Phase  
**EZ Update**  
- ASRock Auto Driver Installer

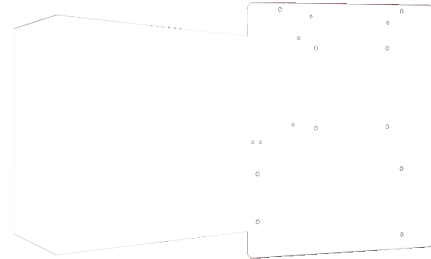

**CPU**  
- Supports 13<sup>th</sup> Gen & 12<sup>th</sup> Gen Intel® Core™ Processors (LGA1700)  
- Supports Intel® Hybrid Technology  
- Supports Intel® Turbo Boost Max 3.0 Technology  
- Supports Intel® Thermal Velocity Boost (TVB)  
- Supports Intel® Adaptive Boost Technology (ABT)

**Memory**  
- Dual Channel DDR4 Memory Technology  
- 2 x DDR4 DIMM Slots  
- Supports DDR4 non-ECC, un-buffered memory up to 5333+(OC)\*  
- Supports ECC UDIMM memory modules (operate in non-ECC mode)  
- Max. capacity of system memory: 64GB\*  
- Supports Intel® Extreme Memory Profile (XMP) 2.0

\*1DPC 1R Up to 5333+ MHz (OC), 3200 MHz Natively.  
1DPC 2R Up to 4400+ MHz (OC), 3200 MHz Natively.

**Graphics**  
- Intel® Xe Graphics Architecture (Gen 12)  
- 1 x HDMI 2.1 TMDS Compatible, supports HDCP 2.3 and max. resolution up to 4K 60Hz  
- 1 x DisplayPort 1.4 with DSC (compressed), supports HDCP 2.3 and max. resolution up to 8K 60Hz / 5K 120Hz  
- 1 x D-Sub, supports max. resolution up to Full HD (1920x1080) 60Hz

\*Intel® UHD Graphics Built-in Visuals and the VGA outputs can be supported only with processors which are GPU integrated.

**LAN**  
- Gigabit LAN 10/100/1000 Mb/s  
- Realtek 8111H

**Storage**

**CPU:**  
- 1 x Hyper M.2 Socket (M2\_1, Key M), supports type 2260/2280 PCIe Gen4x4 (64 Gb/s) mode\*

**Chipset:**  
- 1 x Ultra M.2 Socket (M2\_2, Key M), supports type 2260/2280 SATA3 6.0 Gb/s & PCIe Gen3x4 (32 Gb/s) modes\*  
- 4 x SATA3 6.0 Gb/s Connectors\*\*

\*Supports Intel® Volume Management Device (VMD)  
Supports NVMe SSD as boot disks

\*\*If M2\_2 is occupied by a SATA-type M.2 device,

Chipset  
- Intel®

BIOS  
- 128M

Audio  
- 7.1 CH

Slots  
**CPU:**  
- 1 x PC  
**Chipset:**  
- 2 x PC  
- 1 x M  
PCIe W

\*Suppo

SATA3\_3 will be disabled.

#### RAID

- Supports RAID 0, RAID 1, RAID 5 and RAID 10 for SATA storage devices

#### Connector

- 1 x SPI TPM Header
- 1 x Chassis Intrusion and Speaker Header
- 1 x CPU Fan Connector (4-pin)\*
- 1 x CPU/Water Pump Fan Connector (4-pin) (Smart Fan Speed Control)\*\*
- 2 x Chassis/Water Pump Fan Connectors (4-pin) (Smart Fan Speed Control)\*\*\*
- 1 x 24 pin ATX Power Connector
- 1 x 8 pin 12V Power Connector
- 1 x Front Panel Audio Connector
- 2 x USB 2.0 Headers (Support 3 USB 2.0 ports)
- 1 x USB 3.2 Gen1 Header (Supports 2 USB 3.2 Gen1 ports)

\*CPU\_FAN1 supports the fan power up to 1A (12W).

\*\*CPU\_FAN2/WP supports the fan power up to 2A (24W).

\*\*\*CHA\_FAN1~2/WP support the fan power up to 2A (24W).

CPU\_FAN2/WP and CHA\_FAN1~2/WP can auto detect if 3-pin or 4-pin fan is in use.

#### Software and UEFI

##### Software

- ASRock Motherboard Utility (A-Tuning)
- ASRock XFast LAN

##### UEFI

- ASRock EZ Mode
- ASRock Full HD UEFI
- ASRock My Favorites in UEFI
- ASRock Auto Driver Installer
- ASRock Instant Flash
- ASRock Easy RAID Installer

\*These utilities can be downloaded from ASRock Live Update & APP Shop.

#### Form Factor

- Micro ATX Form Factor: 9.6-in x 7.9-in, 24.4 cm x 20.1 cm

#### Certifications

- FCC, CE
- ErP/EuP ready (ErP/EuP ready power supply is required)

#### USB

- 1 x USB 3.2 Gen1
- 5 x USB 2.0
- 5 x USB 2.0
- 2 x USB 2.0
- 1 x PS/2
- 1 x D-Sub
- 1 x HD Audio
- 1 x D-Sub
- 1 x USB 3.2 Gen1
- 3 x USB 2.0
- 2 x USB 2.0
- 1 x RJ45
- HD Audio

#### Accessories

- 1 x User Manual
- 1 x I/O Panel
- 2 x SATA to IDE Adapter
- 3 x Screws

#### OS

- Micro ATX