


MB s1700 ASRock B760M-HDV/M.2 D4 90-MXBL40-A0UAYZ

Šifra: 8192
Kategorija proizvoda: Intel
Proizvođač: AsRock

Cena: **9.714,00** rsd.

Unique Feature
Rock-Solid Durability
- 5+1+1 Power Phase
EZ Update
- ASRock Auto Driver Installer

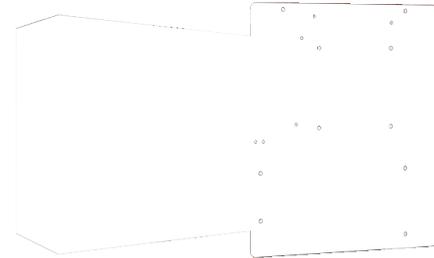

CPU
- Supports 13th Gen & 12th Gen Intel® Core™ Processors (LGA1700)
- Supports Intel® Hybrid Technology
- Supports Intel® Turbo Boost Max 3.0 Technology
- Supports Intel® Thermal Velocity Boost (TVB)
- Supports Intel® Adaptive Boost Technology (ABT)

Memory
- Dual Channel DDR4 Memory Technology
- 2 x DDR4 DIMM Slots
- Supports DDR4 non-ECC, un-buffered memory up to 5333+(OC)*
- Supports ECC UDIMM memory modules (operate in non-ECC mode)
- Max. capacity of system memory: 64GB*
- Supports Intel® Extreme Memory Profile (XMP) 2.0

*1DPC 1R Up to 5333+ MHz (OC), 3200 MHz Natively.
1DPC 2R Up to 4400+ MHz (OC), 3200 MHz Natively.

Graphics
- Intel® Xe Graphics Architecture (Gen 12)
- 1 x HDMI 2.1 TMDS Compatible, supports HDCP 2.3 and max. resolution up to 4K 60Hz
- 1 x DisplayPort 1.4 with DSC (compressed), supports HDCP 2.3 and max. resolution up to 8K 60Hz / 5K 120Hz
- 1 x D-Sub, supports max. resolution up to Full HD (1920x1080) 60Hz

*Intel® UHD Graphics Built-in Visuals and the VGA outputs can be supported only with processors which are GPU integrated.

LAN
- Gigabit LAN 10/100/1000 Mb/s
- Realtek 8111H

Storage

CPU:
- 1 x Hyper M.2 Socket (M2_1, Key M), supports type 2260/2280 PCIe Gen4x4 (64 Gb/s) mode*

Chipset:
- 1 x Ultra M.2 Socket (M2_2, Key M), supports type 2260/2280 SATA3 6.0 Gb/s & PCIe Gen3x4 (32 Gb/s) modes*
- 4 x SATA3 6.0 Gb/s Connectors**

*Supports Intel® Volume Management Device (VMD)
Supports NVMe SSD as boot disks

**If M2_2 is occupied by a SATA-type M.2 device,

Chipset
- Intel®

BIOS
- 128M

Audio
- 7.1 CH

Slots
CPU:
- 1 x PC
Chipset:
- 2 x PC
- 1 x M
PCIe W

*Suppo

SATA3_3 will be disabled.

RAID

- Supports RAID 0, RAID 1, RAID 5 and RAID 10 for SATA storage devices

Connector

- 1 x SPI TPM Header
- 1 x Chassis Intrusion and Speaker Header
- 1 x CPU Fan Connector (4-pin)*
- 1 x CPU/Water Pump Fan Connector (4-pin) (Smart Fan Speed Control)**
- 2 x Chassis/Water Pump Fan Connectors (4-pin) (Smart Fan Speed Control)***
- 1 x 24 pin ATX Power Connector
- 1 x 8 pin 12V Power Connector
- 1 x Front Panel Audio Connector
- 2 x USB 2.0 Headers (Support 3 USB 2.0 ports)
- 1 x USB 3.2 Gen1 Header (Supports 2 USB 3.2 Gen1 ports)

*CPU_FAN1 supports the fan power up to 1A (12W).

**CPU_FAN2/WP supports the fan power up to 2A (24W).

***CHA_FAN1~2/WP support the fan power up to 2A (24W).

CPU_FAN2/WP and CHA_FAN1~2/WP can auto detect if 3-pin or 4-pin fan is in use.

Software and UEFI

Software

- ASRock Motherboard Utility (A-Tuning)
- ASRock XFast LAN

UEFI

- ASRock EZ Mode
- ASRock Full HD UEFI
- ASRock My Favorites in UEFI
- ASRock Auto Driver Installer
- ASRock Instant Flash
- ASRock Easy RAID Installer

*These utilities can be downloaded from ASRock Live Update & APP Shop.

Form Factor

- Micro ATX Form Factor: 9.6-in x 7.9-in, 24.4 cm x 20.1 cm

Certifications

- FCC, CE
- ErP/EuP ready (ErP/EuP ready power supply is required)

USB

- 1 x USB 3.2 Gen1
- 5 x USB 2.0
- 5 x USB 2.0
- 2 x USB 2.0
- 1 x PS/2
- 1 x D-Sub
- 1 x HD Audio
- 1 x D-Sub
- 1 x USB 3.2 Gen1
- 2 x USB 2.0
- 1 x RJ45
- HD Audio

Accessories

- 1 x USB 3.2 Gen1
- 1 x I/O Panel
- 2 x SATA 6Gb/s
- 3 x SATA 6Gb/s

OS

- Micro